


Micro Cable CLT 2.0-3.2 mm

Micro cables typically used in outdoor microduct installation applications. The cables are suitable for air-blown installation. Cable parameters such as cable diameter, stiffness and sheath friction are optimized for best installation performance. The cables are based on a central loose tube construction (CLT).

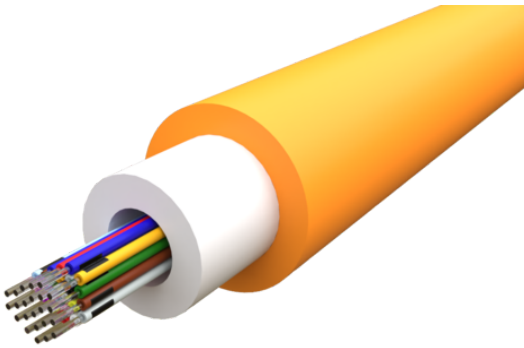

Product number	Product name	Fibre Count	Cable Diameter	Fibre Colour Sequence
5041624	2F SM G657A1 Microcable CLT Orange PBT OD 2,0mm 2100m/dr	2	2 mm	EIA/TIA-598A
5041625	4F SM G657A1 Microcable CLT Orange PBT OD 2,0mm 2100m/dr	4	2 mm	EIA/TIA-598A
5041627	12F SM G657A1 Microcable CLT Orange PBT OD 2,5mm 2100m/dr	12	2.5 mm	EIA/TIA-598A
5041628	24F SM G657A1 Microcable CLT Orange PBT OD 3,2mm 2100m/dr	24	3.2 mm	EIA/TIA-598A