


Product name	Pigtail SM SC/UPC 1.0m 12-Pack G652D 12 color 900µm LSZH
Product code	5068400
GTIN	7332811325861
ETIM-Class	EC000748

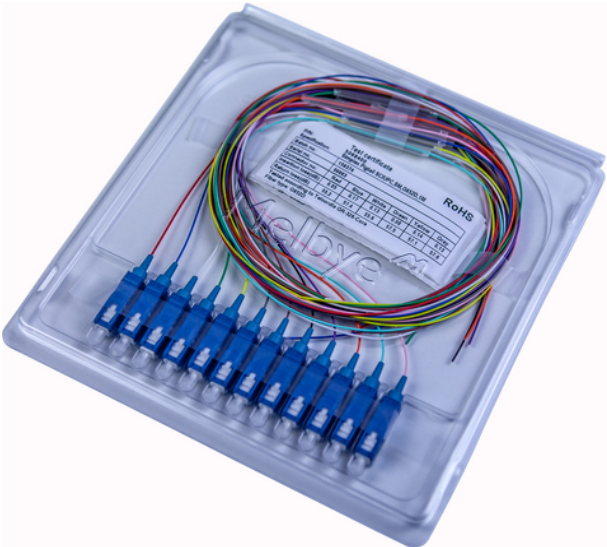

PRODUCT SPECIFICATIONS

Fibreoptic pigtail, singlemode G652D 900µm with one pre- terminated connector. To be used for splicing on a fibreoptic cable. Halogen-free according to EN 60754-1/2 and flame retardant according to IEC 60332-2-2. Meets the requirements of IEC 61300, EN186000-1, EIA/TIA-455 and TELCORDIA GR-326-CORE/GR-63. ID marked with a unique serial number for full traceability to component-level. Each package comes with individual measurement protocols. With pre-mounted 45 mm heat shrink sleeves.

Measurements

Length	182 mm
Height	15 mm
Width	190 mm
Weight	86 g

Technical Specifications - Connectors

Max insertion loss per connector (UPC)	0.2 dB
Max Optical Return Loss for UPC connector	-55 dB
Radius of Curvature UPC	7-25 mm
Max Vertex Offset	50 µm
Fibre Protrusion (nm)	0 +/- 50 nm

Technical Specifications - Pigtails

Connector Type	SC/UPC
Fibre Type	ITU-T G.652 D
Number of pigtails in package	12
Length	1 m
Buffer Type	Semi Tight
Buffer Colour	12 Colours
Fibre Colour Sequence	EIA/TIA-598A
Splice Protection Sleeve Included	Yes
Temperature ranges for Operation	-40°C - +85°C