


Product name	ORM1 Optical Socket 2xSCS/LCD
Product code	5053106
GTIN	7332811107726
ETIM-Class	EC001409

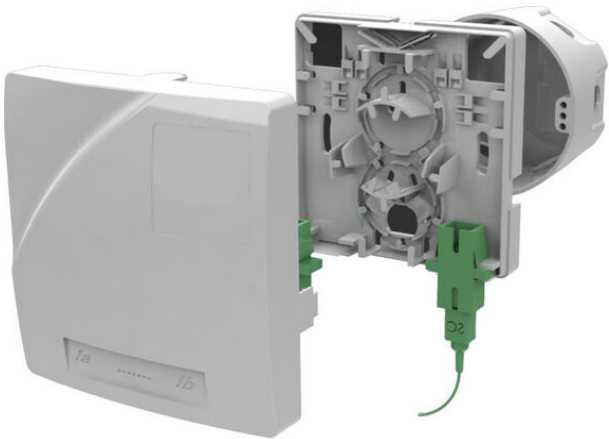

PRODUCT SPECIFICATIONS

The Fiber Access Terminal Box ORM 1 is designed to terminate an optical network using 2 to 4 optical fibers at a customer terminal point. It is installed indoors on a wall.

- Capacity 4 optical connectors
- Connector holder SC simplex or LC duplex
- Maximum capacity is 4 optical splices, heat shrink, RECORD splice, Fiberlock
- Attractive design for indoor usage
- Installing on a surface or flush-mounting box
- Simple optical management
- Direct fiber termination by a connector
- Standard socket dimensions
- Input possibility of fiber with connector
- Use only for fibers G657a, b

Ingress Protection	IP30 / IP54 (under special conditions)
Impact Protection	IK07
Flammability Degree	HB
Material	ABS

Color	RAL 9003
Dimensions (H × W × D)	116 × 81 × 25 mm / extended cover
	81 × 81 × 25 mm / short cover
Weight	0.08 kg
Environment	indoor
Number of Splices	1–4
Number of Connectors	1–4
Connector Type	LC or SC

Measurements

Length	114 mm
Height	50 mm
Width	80 mm
Weight	70 g

Technical Specifications - Termination/Distribution Boxes

Environment	Indoor
Number of splices	4
Number of connectors	2
Connector Type	SC/APC, SC/UPC, LC/UPC, LC/APC
Cable/duct diameters	max 6mm
Splice Holder Included	Yes
IP Codes	ip30
Impact protection degree	ik07
Colour	White RAL 9003
Material	ABS
Fire Resistance	hb