


Product name	Easy indoor distribution box 24F
Product code	5053109
GTIN	7332811310539
ETIM-Class	EC002067

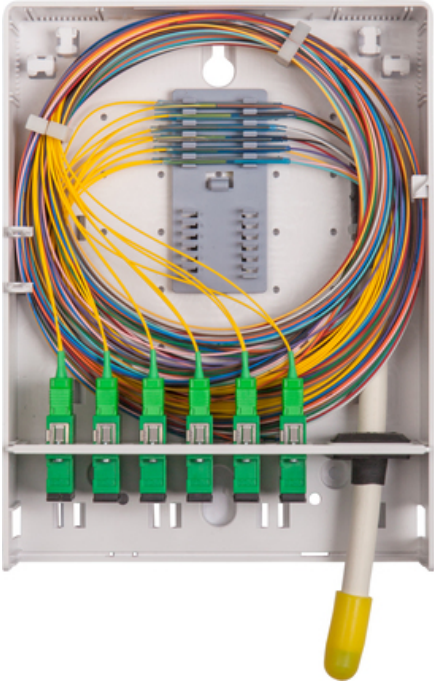

PRODUCT SPECIFICATIONS

The Fiber Optic Box MTeH EASY is designed as a simple box for indoor installation. It supports especially FTTH networks. It can be used for storage of a pre-connectorized cable or blown cable reserves, which can be spliced when connecting the customer. It can also be used as a distribution box in small buildings or as a floor box.

- Easy installation
- Wide portfolio of accessories - see datasheet below
- Flat base with mounting holes
- Space for cable reserve before connecting customer
- Possibility to use the box for splicing or patching
- Two positions for adaptor plate
- Capacity up to 6x SC duplex, or 6x LC quad
- Gradiated rubber gland for cable Ø 3-10mm (on each side)
- Breakable outputs on back side (connection through the wall directly to customer)
- Possibility to use loop-through cable
- Splice holder (max. capacity 24 splices, for fibres G.652d a G.657a,b)
- Possibility to place PLC splitter

Coverage Degree	IP 20 to EN 60529
Self-Extinguishing Degree	V2 to UL94
Impact protection degree	IK 5 to EN 50102
Color	White RAL 9003

Dimensions	205x157x60
Weight	0,350 kg
Material – distribution box	ABS - Halogen free, flame retardant (V2)
Environment	Indoor
Number of splices	1-12 splices, 13-24 splices
Number of connectors	1-12 connectors, 13-24 connectors
Connector type	SC, LC

Measurements

Length	60 mm
Height	205 mm
Width	157 mm
Weight	400 g

Technical Specifications - Termination/Distribution Boxes

Environment	Indoor
Number of splices	24
Number of connectors	24
Connector Type	SC, LC
Cable/duct diameters	3-10mm
Splice Holder Included	Yes
IP Codes	ip20
Impact protection degree	ik05
Colour	White RAL 9003
Material	ABS
Halogen Free	Yes
Fire Resistance	v2 to ul94